

# Precision Adapters in Series


## ► 2.4mm to 2.4mm

### Electrical


Frequency	DC to 50 GHz
Insertion Loss	0.45 dB @ 50 GHz
Impedance	50Ω
VSWR	1.2 : 1 max.
Temperature	- 40°C to + 125°C

### Materials

Body	Stainless Steel	Passivated
Center Contact	Brass / BeCu	Gold Plated
Insulator	Engineering Plastic	-

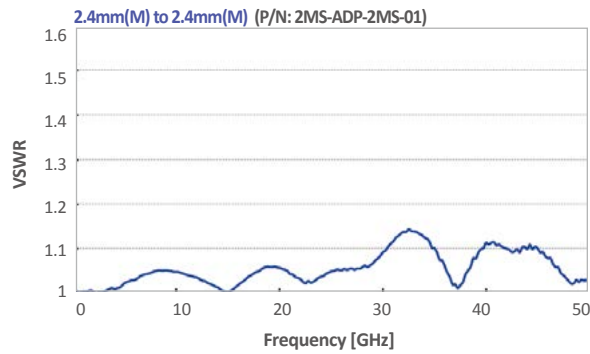


### 2.4 mm (M) - 2.4 mm (M)

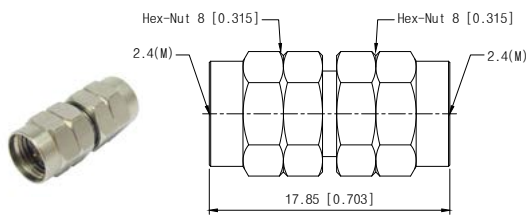


- Part No. 2MS-ADP-2MS-01 (G01M01MSD001)
- Freq. 50 GHz
- VSWR Max. 1.2

### 2.4 mm (M) - 2.4 mm (F)

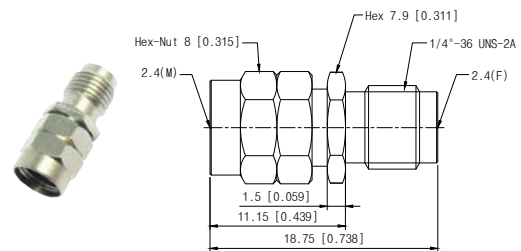

- Part No. 2MS-ADP-2FS-01 (G01M01FSD001)
- Freq. 50 GHz
- VSWR Max. 1.2

### 2.4 mm (F) - 2.4 mm (F)

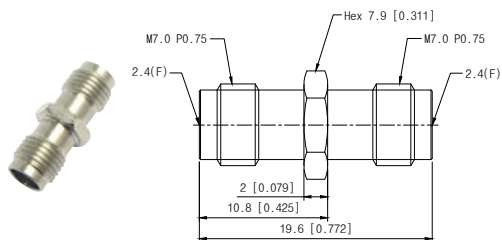

- Part No. 2FS-ADP-2FS-01 (G01F01FSD001)
- Freq. 50 GHz
- VSWR Max. 1.2