

# Precision Adapters in Series


## ► N to N

### Electrical

|                |                   |
|----------------|-------------------|
| Frequency      | DC to 18 GHz      |
| Insertion Loss | 0.35 dB @ 18 GHz  |
| VSWR           | 1.2 : 1 max.      |
| Temperature    | - 40°C to + 125°C |


### Materials

|                |                     |             |
|----------------|---------------------|-------------|
| Body           | Stainless Steel     | Passivated  |
| Center Contact | Brass / BeCu        | Gold Plated |
| Insulator      | Engineering Plastic | -           |

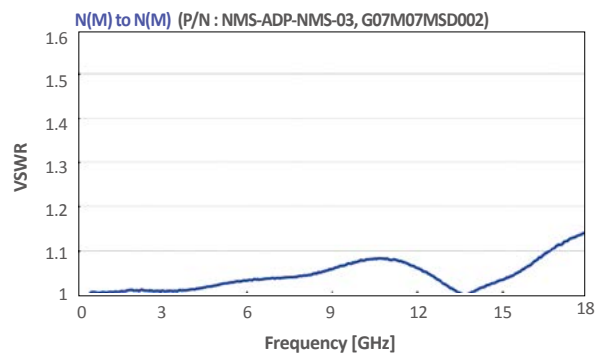


Unit : mm [Inch]

### N (M) - N (M)

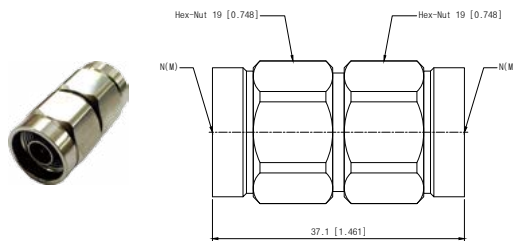


- Part No. NMS-ADP-NMS-03 (G07M07MSD002)
- Freq. 18 GHz
- VSWR Max. 1.2

### N (M) - N (F)

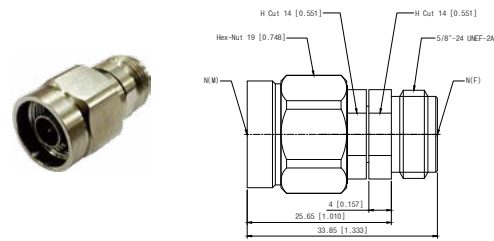

- Part No. NMS-ADP-NFS-03 (G07M07FSD001)
- Freq. 18 GHz
- VSWR Max. 1.2

### N (F) - N (F)

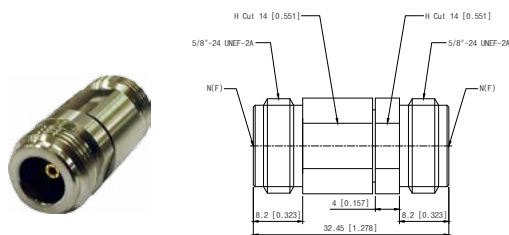

- Part No. NFS-ADP-NFS-03 (G07F07FSD003)
- Freq. 18 GHz
- VSWR Max. 1.2