

Precision Adapters between Series


► 2.4 mm to SMA

Electrical

Frequency	DC to 18 GHz
Insertion Loss	0.25 dB @ 18 GHz
VSWR	1.2 : 1 max.
Temperature	- 40°C to + 125°C


Material data

Body	Stainless Steel	Passivated
Center Contact	Beryllium Copper(BeCu) Brass	Gold Plated Gold Plated
Insulator	PTFE	

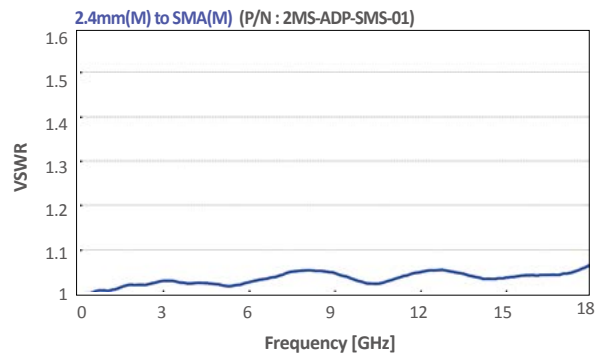


Unit : mm [Inch]

2.4 mm (M) – SMA (M)

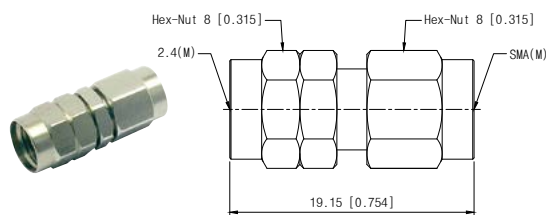


- Part No. 2MS-ADP-SMS-01
- Freq. 18 GHz
- VSWR Max. 1.2

2.4 mm (M) – SMA (F)

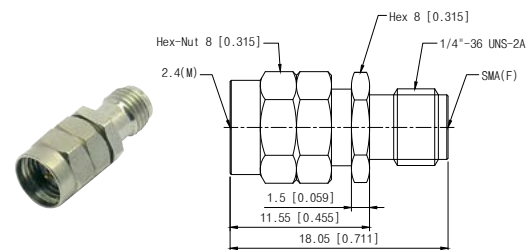


- Part No. 2MS-ADP-SFS-01
- Freq. 18 GHz
- VSWR Max. 1.2

2.4 mm (F) – SMA (M)

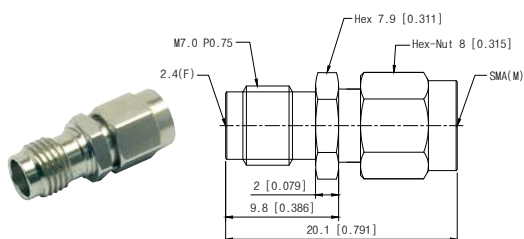

- Part No. 2FS-ADP-SMS-01
- Freq. 18 GHz
- VSWR Max. 1.2

2.4 mm (F) - SMA (F)

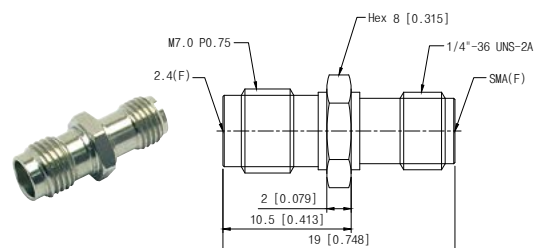

- Part No. 2FS-ADP-SFS-01
- Freq. 18 GHz
- VSWR Max. 1.2